



SOLID F40

Ideal for:

- > Label batch printing
- > Ticket printing
- > Business and logistics documents
- > Replacement printer of choice for discontinued laser printers
- > Perfect upgrade from matrix printers to laser

HIGHLIGHTS / FEATURES / SPECIAL ATTRIBUTES

- > Most economical cold fusing printer on the market
- > Prints on paper, PVC, plastic, etc.
- > USB, Ethernet (10/100 Mbit) as standard
- > Laser and matrix printer compatible
- > SAP with the standard PCL5e emulation
- > Perfect control via Status Out
- > Optional IPDS emulation making it the printer of choice for IBM solutions

**HIGH PERFORMANCE,
IMPRESSIVE COST
EFFECTIVENESS**



SOLID F40

Inexpensive to purchase, inexpensive to operate: the SOLID F40 is the most economical printer in its class. As a continuous laser printer for medium printing volumes it covers a very broad spectrum of deployment areas. The powerful Microplex Controller guarantees connection versatility, easy system integration and high printing performance. Cold fusing via Xenon flash lamps also enables thermally sensitive materials such as plastic or PVC to be used. And fusing is also trouble-free even on thick materials.

SOLID F40**SPECIFICATIONS****Print Engine**

Print technology	LED, OPC Xenon-flash lamp
Controller	MPC 3.3 with Intel CPU (>2 GHz CISC Processor)
Print speed	2000 lpm (6 lpi) up to 40 pages/minute (Letter or Landscape)
Print resolution	max. 600 dpi x 600 dpi
Duty cycle	up to 300.000 pages (based on a using period of 60 months)
Power supply	230V +/-10% /50 Hz
Power consumption	max 3.0 kVA (delivery with 16Amp. CEE connector)
Acoustic noise	< 55 dB (A)
Dimensions (WxDxH in Inch)	31.7"W x 33.5"D x 49.2"H
Weight	604 lbs (incl. Stacker)
Environment temperature	50 - 86°F
Relative humidity	30 - 80 % (rel., non-condensing)
Interfaces	Serial: USB 2.0 Parallel: IEEE 1284 (Centronics) LAN: Ethernet-Interface 10/100 MBit, bi-directional (TCP/IP)
Memory	RAM: 512MB Flash: 64MB

MPC 3.3 High-End Print-Controller**Emulations**

MICROPLEX IDOL, HP PCL 5e, Epson FX-80, IBM Proprinter, Diablo 630, µ-Postscript, TIFF

Optional Emulations

IPDS, Printronix IGP, PGL, Magnum Code V, Kyocera Prescribe, Express, ZPLII, Datamax, EPL,
(more emulations on request)

Barcodes

PDF 417, EAN 8, 13,, 128, add on, 2/5 3-stroke Datalogic, 2/5 3-stroke Matrix, Codabar, Royalbar, Planet, Jet-caps (HP/SAP), Code 39, 128 MSI, UPC A, E, Postnet, KIX, USPS One Code

Optional Barcodes

QR Code, UPS-Maxicode, Datamatrix, USD5, Aztec-Code, (more barcodes on request)

Additional functions

Intelligent barcode generation	on-the-fly in the printer
Format splitting	in several subformats by command
Integrated form management	up to 12 MB flash for forms and fonts inside the printer

Optional functions**Status-Out**

gives notice of each correctly printed page via interface

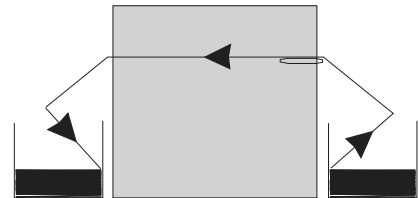
SPS-Control (EMBEDDED INTELLIGENCE - Enabling two-way communication between printer and a PLC)

integration of the printer into production lines is possible, controlled by SPS-interface.

**Printable Media****Size**

Form length	7" - 24"
With stacker	8" - 14"
Form width	6,5" - 16"
Printable area	14,6"

Weight	60 - 204 g/m ²
---------------	---------------------------

**Paper Path****Input**

push tractor

Output

stacker

capacity: 3.000 pages (at 64 g/m²)
(minimal weight (64 g / m²) depending on
paper properties and quality of material conversion)

The brand names referred to are the registered trademarks of the respective companies. All figures and details in italics and highlighted in color are optional. Technical data is subject to change. The information contained in this specification sheet refers exclusively to the described details and not to warranted characteristics. No guarantee is assumed. The information do not exempt from the obligation for inspection of each respective individual case. Version 21.11.2016

Microplex Printware Corporation
100 Northfield Road | Bedford, OH 44146
phone (440) 374-2424 | fax (440) 374-2422



PRINTING TECHNOLOGIES
ENGINEERED IN GERMANY

www.microplex-usa.com